




PRODUCT DATA SHEET

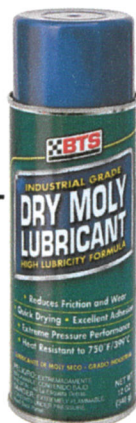

Industrial Grade Dry Moly Lubricant

High Lubricity Formula

Stock No. B-00014

BTS Industrial Grade Dry Moly Lubricant forms a thin, quick-drying film that provides clean, long-wearing lubrication and protection. It withstands extreme pressures and temperatures and adheres to most substrates. BTS B-00014 also possesses excellent release properties. Not recommended for friction or light-duty bearings.

V.O.C.: Compliant with all U.S. State and Federal Regulations

BENEFITS:

- Quick Drying
- High Lubricity Formula
- Moly Lubricant Adheres To the Surface
- Extreme Pressure Performance
- Heat Resistant To 750°F/399°C

APPLICATIONS

Gears	High Temp Ovens	Pistons
Cables	Sliding Doors	Sprockets
Chains	Tumbler Locks	Conveyors
Tracks	Pump Assemblies	Wire Ropes
Hinges	Lock Mechanisms	High-Pressure Gear Drives
Windows	Thread Lubrication	

- Excellent Break-in Lubricant for Pistons, Pump Assemblies, Gears, Cables and other sliding parts
- Aids assembly of Press Fits

SPECIFICATIONS

Can Size: 16 oz.	Carton Pack: 12
Net Weight: 12 oz. (340g)	Extension tube: No
Fluid Contents: 15.8 oz. (468 mL)	

PHYSICAL/CHEMICAL CHARACTERISTICS

Boiling Range: -44 °F to 177 °F	Specific Gravity: (H ₂ O=1): 0.73
Vapor Density: Unknown	Evaporation Rate: Unknown
Solubility in Water: Slight to Moderate	
Appearance/Odor: Aerosol Product Containing Gray Liquid/Typical Solvent	
Flash Point: -156 °F	Method Used: Estimated

HMIS RATINGS

Health	1
Flammability	4
Reactivity	0
Personal Protection	

*All information is subject to change. Not responsible for errors.
We recommend you call to verify product specifications before ordering.*

R.10/11

Formulating For Professionals for Over 50 Years

BTS Industries, APEX International Group, Inc. • P.O. Box 14607,
North Palm Beach, FL 33408 • www.apexig.com

(561) 656-0850 • Fax: (561) 656-0870 • email: apex@apexig.com

Main Distribution Center – Bridgeview (Chicago), IL © 2012 Apex International Group, Inc.



Made with Pride
in the U.S.A.