




PRODUCT DATA SHEET

CUTTING OIL

Industrial Grade

Stock No. B-00022

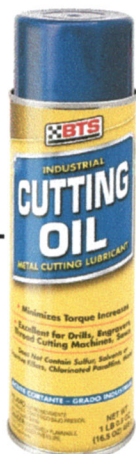

BTS Cutting Oil is an excellent cutting lubricant for use on ferrous and non-ferrous metals, including brass and aluminum. It minimizes torque increases and is compatible with all manual and motor driven thread cutting tools. BTS B-00022 does not contain sulfur, solvents or inactive fillers, chlorinated paraffins or water.

V.O.C.: Compliant with all U.S. State and Federal Regulations

BENEFITS:

- Metal Cutting Lubricant
- Minimizes Torque Increases
- Excellent for Thread Cutting Machines, Drills, Saws, Engravers

APPLICATIONS

Drilling	Gear Cutting Machinery
Cutting	Piercing
Tapping	Broaching
Sawing	Engraving
Threading	Deep Drawing

SPECIFICATIONS

Can Size: 20 oz.	Carton Pack: 12
Net Weight: 16.5 oz. (468 g)	Extension tube: Yes
Fluid Contents: 19.6 fl. oz (579 mL)	

PHYSICAL/CHEMICAL CHARACTERISTICS

Boiling Range: -44 °F to 611 °F	Specific Gravity: (H ₂ O=1): 0.85
Vapor Density: Heavier Than Air	Evaporation Rate: Slower Than Ether
Solubility in Water: Nil	
Appearance/Odor: Aerosol Product Containing Black Liquid/Petroleum	
Flash Point: -156 °F	Method Used: None

HMIS RATINGS

Health	1
Flammability	4
Reactivity	0
Personal Protection	

*All information is subject to change. Not responsible for errors.
We recommend you call to verify product specifications before ordering.*

R.10/11

Formulating For Professionals for Over 50 Years

BTS Industries, APEX International Group, Inc • P.O. Box 14607,
North Palm Beach, FL 33408 www.apexig.com

(561) 656-0850 • Fax: (561) 656-0870 • email: apex@apexig.com

Main Distribution Center – Bridgeview (Chicago), IL © 2012 Apex International Group, Inc.



Made with Pride
in the U.S.A.