




PRODUCT DATA SHEET

Industrial Grade Nickel Anti-Seize Brush-Top Paste Lubricant Stock No. B-00193

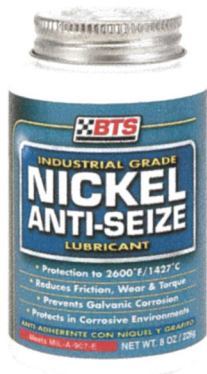

BTS Nickel Anti-Seize Paste Lubricant combines a high concentration of Nickel, enhanced with a blend of premium grade aluminum-complex grease and graphite to lubricate and insulate dissimilar metals from self-generated galvanic corrosion. It prevents seizing and galling at high temperatures and pressures while permitting the easy removal of parts that have been subjected to adverse conditions. BTS B-00193 is excellent for connectors and mechanisms operating in extremely corrosive environments in chemical plants, refineries, and sewage plants. It also helps to lubricate and ensure proper torque during assembly.

V.O.C.: Compliant with all U.S. State and Federal Regulations

MILITARY SPECS

Conforms to MIL-A-907-E

BENEFITS:

- Easy to Use Brush-on Applicator
- Useable with Most Metals Including Stainless – Even Those Which are Unstable With Copper
- Acid Resistant • Reduces Friction, Wear & Torque
- Prevents Galvanic Corrosion, Galling, Fretting, Seizing & Pitting
- Protects Metal From Extreme Pressure & Heat
- Heat Resistant To 2600°F/1427°F
- Eases Assembly and Disassembly
- Lubricates Threads to ensure Accurate Torque Readings During Assembly

APPLICATIONS

Bolts	Rollers	Dies	Gear Reducers
Screws	Tool Joints	Nuts	Hydraulic Pipes
Fittings	Wheel Lugs	Studs	High Stress Bolting
Press Fits	Valve Shafts	Drills	Extrusion Dies
Spark Plugs	Couplings	Chains	Threaded Connections
Exhaust Studs	Drilling Rigs	Pivots	Sliding Mechanisms
			Manifold Fittings/Surfaces

SPECIFICATIONS

Can Size: 8 oz.

Net Weight: 8 oz. (227g)

Carton Pack: 12

Brush Top: Yes

PHYSICAL/CHEMICAL CHARACTERISTICS

Boiling Range: 500 °F

Vapor Density: Heavier Than Air

Solubility in Water: Nil

Appearance/Odor: Gray-Colored Heavy Paste/Oily

Flash Point: 302 °F

Method Used: P-M

Specific Gravity: (H₂O=1): 1.25

Evaporation Rate: Slower Than Ether

HMIS RATINGS

Health	1
Flammability	1
Reactivity	0
Personal Protection	

*All information is subject to change. Not responsible for errors.
We recommend you call to verify product specifications before ordering.*

Formulating For Professionals for Over 50 Years

BTS Industries, APEX International Group, Inc • P.O. Box 14607,

North Palm Beach, FL 33408 • www.apexig.com

(561) 656-0850 • Fax: (561) 656-0870 • email: apex@apexig.com

Main Distribution Center – Bridgeview (Chicago), IL © 2013 Apex International Group, Inc.



Made with Pride
in the U.S.A.